




UNITÉ EXTÉRIEURE MINI-MRV

8 KW - 10 KW - 12 KW - 14 KW
16 KW - 22 KW - 26 KW

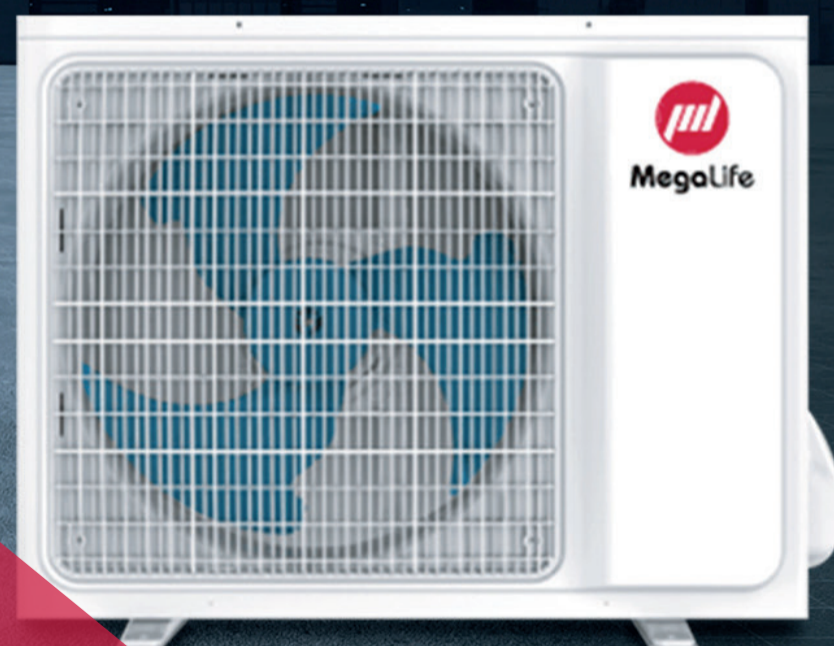

Model	ML-MRV-H080/ NR1	ML-MRV-H100/ NR1	ML-MRV-H120/ NR1	ML-MRV-H140/ NR1	ML-MRV-H160/ SRIDCS7	ML-MRV-H220/ SRIDCS7	ML-MRV-H260/ SRIDCS7
Capacité de refroidissement (KW)	8,00	10,00	12.30	14.00	16.00	22.40	26.00
Capacité de chauffage (KW)	9,00	11,50	13.20	16.00	18.00	24.50	28.50
Alimentation électrique (V,HZ,P)	220~240, 50/60, 1	220~240, 50/60, 1	220~240, 50/60, 1	220~240, 50/60, 1	380~415, 50/60, 3	380~415, 50/60, 3	380~415, 50/60, 3
Refroidissement absorbé (KW)	2.30	3.00	3.25	3.95	4.70	6.80	7.60
Chauffage absorbé (KW)	2.40	3.20	3.41	4.05	4.61	5.90	6.80
Courant de refroidissement (A)	10.10	13.20	14.30	17.30	6.96	11.10	12.40
Courant de chauffage (A)	10.50	14.00	15.00	17.80	6.76	9.60	11.10
EER	3.48	3.33	3.78	3.54	3.40	3.29	3.42
COP	3.75	3.59	3.87	3.95	3.90	4.15	4.19
SEER	6.20	6.10	6.10	6.10	6.10	6.10	6.10
SCOP	4.20	4.10	4.10	4.00	4.00	4.00	4.00
Débit d'air (m ³ /h)	4154	4154	7200	7200	7200	10500	10500
Niveau de pression sonore dB(A)	56	56	57	57	57	60	60
Nombre max des unités intérieures	4	5	7	8	9	13	15
Rapport de connexion %	50~130	50~130	50~130	50~130	50~130	50~130	50~130
Dimension (L.D.H) net (mm)	970x370x803	970x370x803	970x340x1320	970x340x1320	940x370x1325	1120x400x1510	1120x400x1510
Dimension (L.D.H) emballage (mm)	1105x495x890	1105x495x890	1080x430x1440	1080x430x1440	1105x495x890	1270x560x1710	1270x560x1710
Poids net (Kg)	66	66	86	86	103	165	165
Poids brut (Kg)	71	71	91	91	113	185	185
Réfrigérant	R410a	R410a	R410a	R410a	R410a	R410a	R410a
Diamètre de tuyau, côté liquide (mm)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)
Diamètre de tuyau, côté gaz (mm)	15.88(5/8)	15.88(5/8)	15.88(5/8)	15.88(5/8)	19.05(3/4)	22.2(7/8)	22.2(7/8)
Plage de fonctionnement, refroidissement °C	-15 /49	-15 /49	-15 /49	-15 /49	-15 /49	-15 /49	-15 /49
Plage de fonctionnement, chauffage °C	-15 /27	-15 /27	-15 /27	-15 /27	-15 /27	-15 /27	-15 /27